

Deep Cycle SLA Battery

DC SERIES

DC (Deep cycle) Series batteries are designed for deep discharge application, with special chemical formula for plates active paste material, slightly stronger electrolyte and low temperature design, which can withstand repeated deep cyclic application, such as Solar Energy System, Golf Trolley, Electric

Application


- Solar Energy System
- Golf Cars and Buggies
- Electric Powered Vehicles
- Wheel Chairs
- Power Tools
- Electric Powered Toys
- Control System
- Vacuum Cleaners
- Medical Equipments
- UPS

General Features


- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy Resin
- Safety valveEPDR
- TerminalCopper
- SeparatorFibre glass
- ElectrolyteSulfuric acid

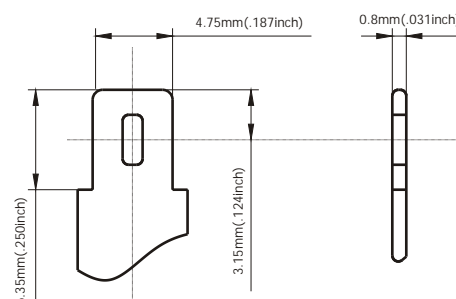


Terminal Dimensions

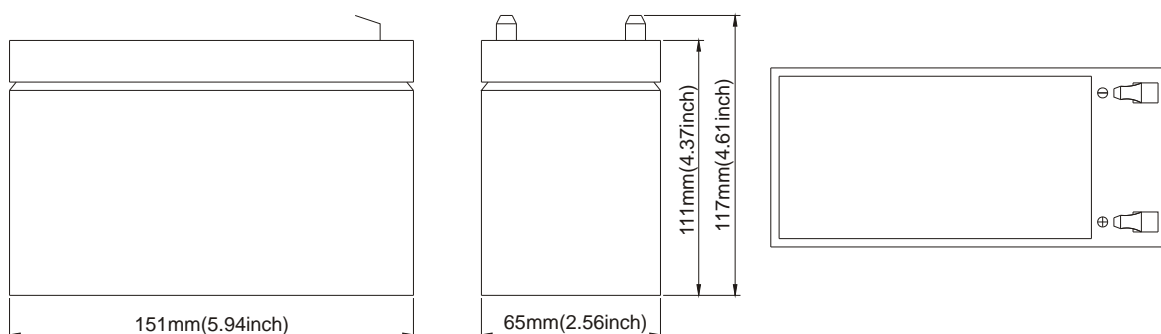

Battery Model	DC 12-9			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity(25°C)	20HR(0.45A,1.75V)	10HR(0.855A,1.75V)	5HR(1.53A,1.75V)	1HR(5.85A,1.75V)
	9AH	8.55AH	7.65AH	5.85AH
Dimensions	Length	Width	Height	Total Height
	151mm(5.94inch)	65mm(2.56inch)	111mm(4.37inch)	117mm(4.61inch)
Approx. Weight	2.9Kg (6.39 lbs)			
Internal Resistance	Full charged at 25°C: 0.02 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15V(-30mV/ °C), max. Current: 2.7A		13.6-13.8V(-20mV/ °C)	

Deep Cycle SLA Battery

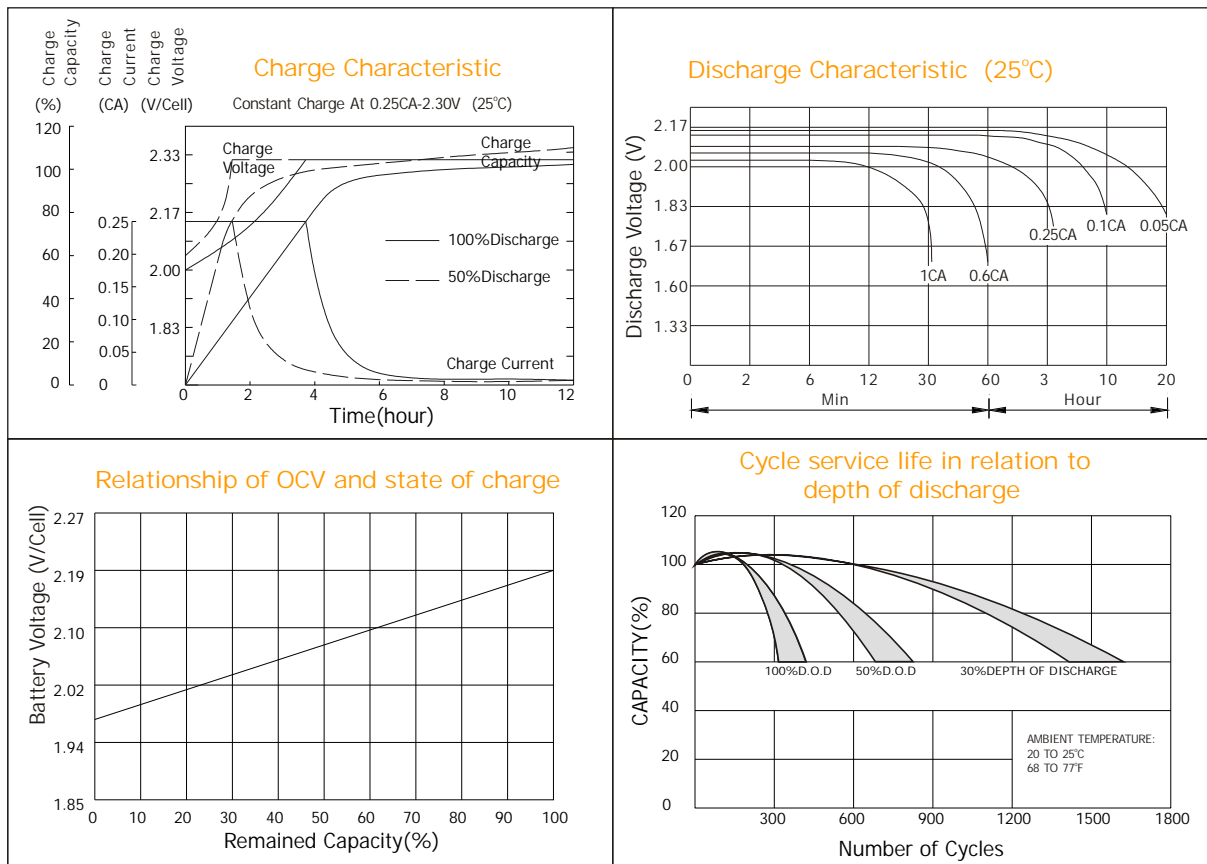

Constant current discharge ratings-amperes at 25°C

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	48.8	30.3	22.9	14.0	7.04	3.09	1.89	1.03	0.56
1.67V	45.8	28.8	22.0	13.3	6.94	2.97	1.85	1.02	0.54
1.70V	41.9	27.7	21.5	12.1	6.73	2.77	1.81	1.01	0.53
1.75V	41.1	26.9	20.8	11.5	6.42	2.68	1.77	1.01	0.51
1.80V	36.8	25.7	18.9	10.7	6.01	2.57	1.66	0.99	0.50
1.85V	32.4	24.4	17.0	9.83	5.60	2.48	1.56	0.98	0.49

Constant power discharge ratings-watts at 25°C

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	85.5	54.8	41.8	25.1	12.8	5.48	3.19	2.11	1.11
1.67V	82.5	53.4	41.3	24.6	12.7	5.31	3.18	2.10	1.07
1.70V	77.7	52.9	40.9	23.1	12.5	5.07	3.14	2.09	1.06
1.75V	78.2	52.7	40.6	22.4	12.3	4.95	3.11	2.06	1.03
1.80V	71.5	51.9	37.6	21.3	11.6	4.80	3.01	2.03	1.00
1.85V	64.9	49.3	34.1	20.0	10.9	4.66	2.92	2.01	0.96

